


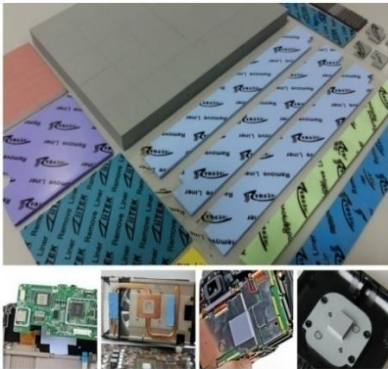

Features

- » Good thermal conductivity: **5.0 W/mK**
- » Naturally tacky needing no further adhesive coating
- » Soft and Compressible for low stress applications
- » Available in varies thickness


Application

- » Cooling components to the chassis of frame
- » Set Top Box
- » Car Battery & Power Supply
- » Charging Pile
- » LED TV/ Lighting
- » Graphics Card Thermal Module


TIF™500-50-11ES Pad Series thermally conductive interface materials are applied to fill the air gaps between the heating elements and the heat dissipation fins or the metal base. Their flexibility and elasticity make them suited to coat very uneven surfaces. Heat can transmit to the metal housing or dissipation plate from the heating elements or even the entire PCB, which effecitly enhances the efficiency and life-time of the heat-generating electronic components.

Typical Properties of TIF™500-50-11ES Pad Series		
Color	Gray	Visual
Construction	Ceramic filled silicone elastomer	*****
Thickness range	0.040"(1.0mm)~0.20" (5.0mm)	ASTM D374
Hardness (Shore OO)	12±5	ASTM 2240
Specific Gravity(g/cc)	3.2	ASTM D297
Operating Temp	-40 ~160 °C	*****
Dielectric Breakdown Voltage(T= 1.0mm)	>5000 VAC	ASTM D149
Dielectric Constant@1MHz	3.8	ASTM D150
Volume Resistivity	>1.0X10 ¹² Ohm-cm	ASTM D257
Thermal Conductivity	5.0W/mK	ASTM D5470
	5.0W/mK	ISO22007-2.2
Flame Rating	V-0	UL94

Pressure. vs. Thermal Resistance

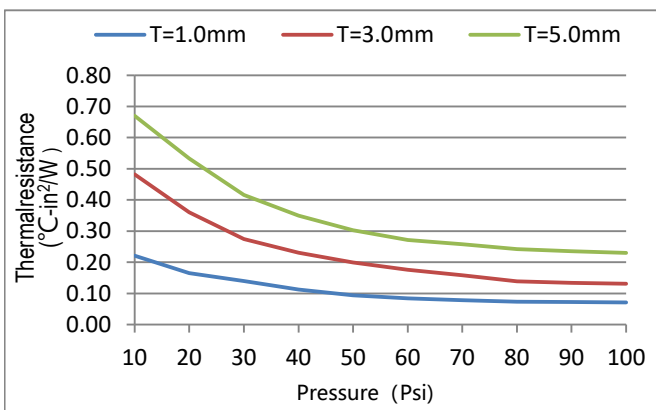

Pressure. vs. Compression Ratio

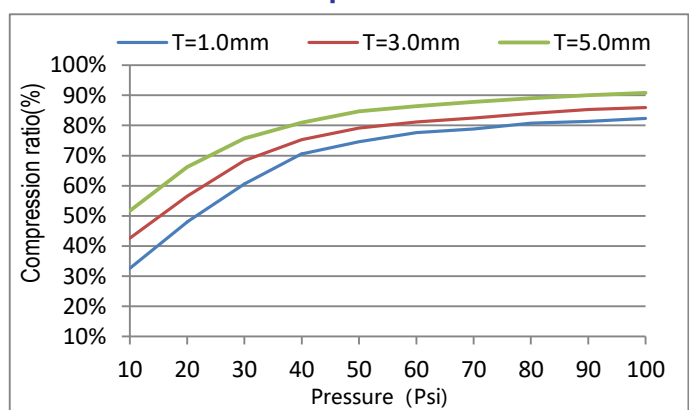

Product Specification

Product Thicknesses: 0.040-inch to 0.200-inch (1.0mm to 5.0mm)

Product Sizes: 8" x 16"(203mm x406mm)

Individual die cut shapes and custom thickness can be supplied. Please contact us for confirming

Application Technology Download
Thermal Conductive Interface Materials



<http://www.ziitek.com>

[Thermally Conductive Materials](#) [Heat Generating Materials](#) [Thermally Conductive Plastics](#) [Foaming Silica Gel](#) [Die-Cutting Products](#)

加拿大 Canada

TEL: +001-604-2998559
E-mail: frances@ziitek.com.tw
<http://www.thermazig.com>

台湾 Taiwan

TEL: +886-2-22771007
E-mail: frances@ziitek.com.tw
<http://www.ziitek.com.tw>

东莞 Dongguan

TEL: +86-769-38801208
E-mail: frances@ziitek.com.cn
<http://www.ziitek.com.cn>

昆山 Kunshan

TEL: +86-512-57816297
E-mail: kelvin@ziitek.com
<http://www.ziitek.com.cn>

杭州 Hangzhou

TEL: +86-571-63850366
E-mail: alex@ziitek.com
<http://www.ziitek.com.cn>

长沙 Changsha

TEL: +86-731-86949836
E-mail: jor@ziitek.com
<http://www.ziitek.com.cn>